


type number	A (mm)	B (mm)	H (mm)	thickness of metal sheet (mm)	weight (kg/pc)
OSHK 50x62_S	300	62	50	0,80	0,24
OSHK 50x62_F					0,28
OSHK 50x125_S	300	125	50	0,80	0,28
OSHK 50x125_F					0,33
OSHK 50x250_S	300	250	50	1,00	0,44
OSHK 50x250_F					0,51
OSHK 100x125_S	372	125	100	0,80	0,55
OSHK 100x125_F					0,64
OSHK 100x250_S	372	250	100	1,0	0,78
OSHK 100x250_F					0,90
OSHK 100x500_S	372	500	100	1,2	1,12
OSHK 100x500_F					1,32

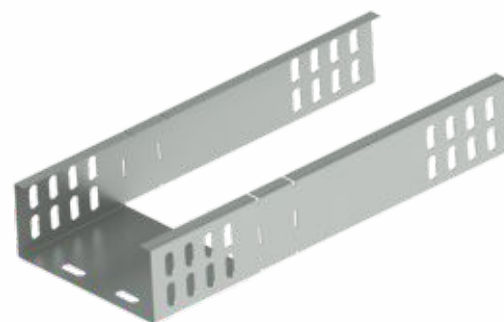

product description: The branch is designed to transition from a horizontal to a vertical route, or from a vertical to a horizontal route.

It is suitable for branching from the main cable routes for example, to machines or other devices.


It is used together with the low elbow NKO.

Protected by Industrial Design.

To fix the connection use the bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

A bolt with a GMT surface finish is used for a tray with an F surface finish.

These items can also be ordered in a varnished version.

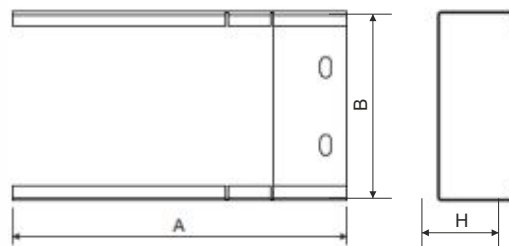

surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm
 F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

sales amount: 1 pc

meets the requirements: ČSN EN 61537:02

storage: ČSN EN 60721-3-1

